


MIN ZOOM

Beam opening

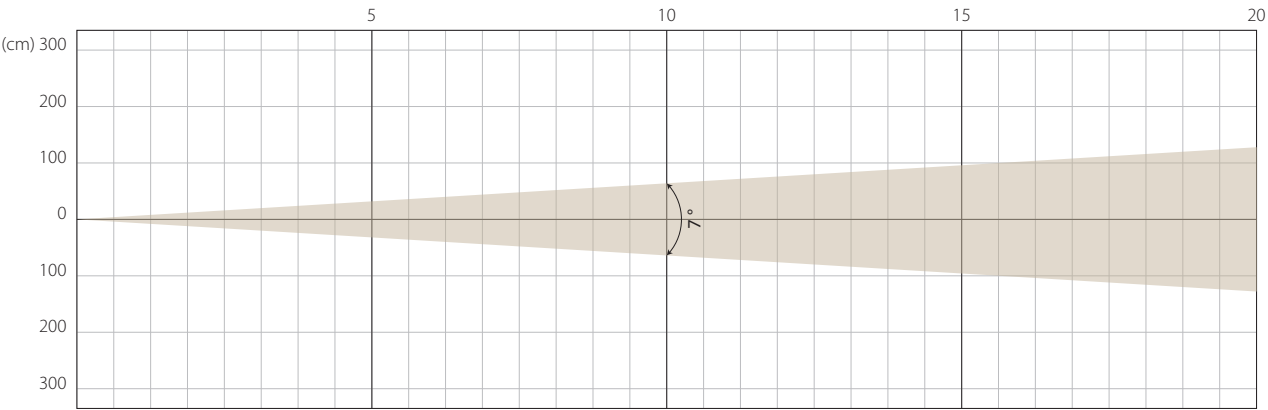


Intensity

Distance (m)	5		10		15		20	
unit	lux	diameter	lux	diameter	lux	diameter	lux	diameter
White	37020	0,62	8715	1,26	4038	1,89	2271	2,52

MIDDLE ZOOM

Beam opening

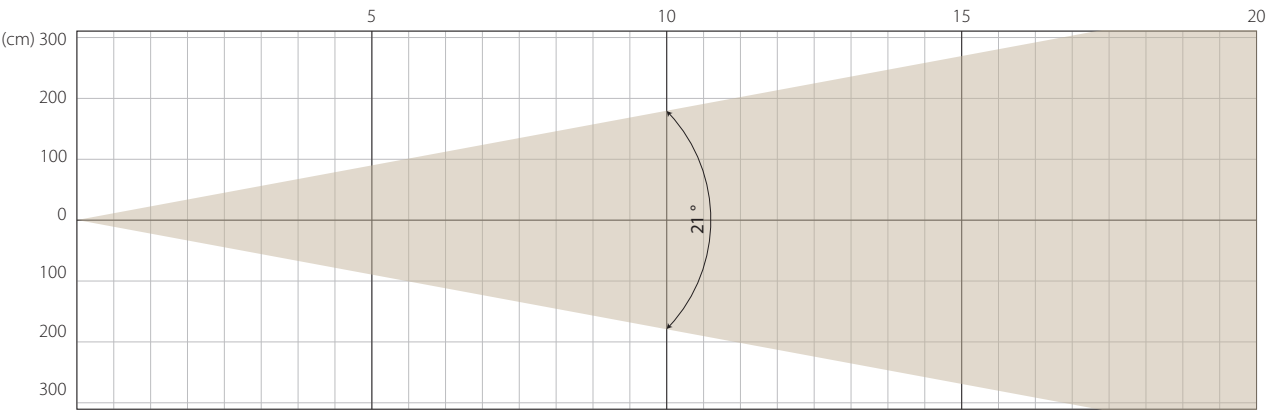


Intensity

Distance (m)	5		10		15		20	
unit	lux	diameter	lux	diameter	lux	diameter	lux	diameter
White	7237	1,83	1902	3,6	998	5,33	570	7,2

MAX ZOOM

Beam opening

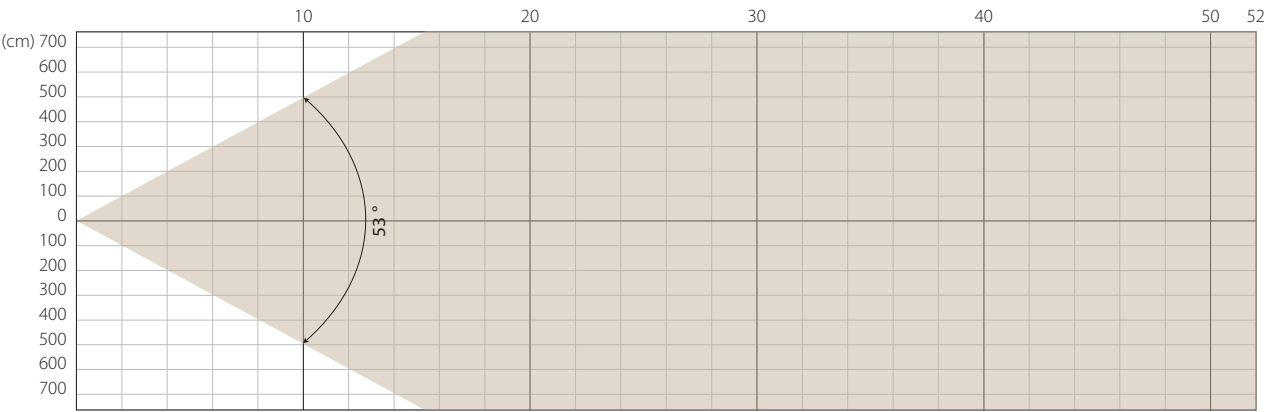

Intensity

Distance (m)	5		10		15		20	
unit	lux	diameter	lux	diameter	lux	diameter	lux	diameter
White	1141	4,99	335	9,98	159	14,97	93	19,96



Total Flux	18979 lm (@zoom 90)
CCT @LED engin	8000 (±500K)
CCT @open	6982 (±500K)
Ra @open	71 (Ra: 70)
TLCI	47
TM-30	Rf: 67, Rg: 93

Fan Mode	Noise Level (dBA)	Flux (lm)
Auto Mode	43,6	18791
Silence Mode	38,3	14253
Stage Mode	45,8	18979
Studio Mode	39,7	15462
Note: noise messured @1m distance, static status, ambient 31 dBA.		

Voltage / Power	100-240V, 50-60Hz	550W
Fixture Dimension / Weight	364.9x210.6x591.6mm	19Kg
Packing Dimension / Weight	46.5x29.5x72.5cm	28.5Kg